


TKX (A2 rostfri)

Funktion: Kryssträskruv med rundat huvud och med pozidrive krysspår.

Spårtypt/bits: Pozidrive 1 och 2.

Material: Rostfritt stål (A2).

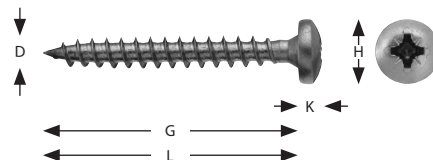

Diameter (D) mm	3,0	3,5	4,0	4,5	5,0
Huvuddiameter (H) mm	6,0	7,0	8,0	9,0	10,0
Huvudhöjd (K) mm	2,2	2,3	2,7	3,0	3,4
Nom. gänglängd (G) upp till L=80 mm	helg.	helg.	helg.	helg.	helg.
Bits nr	1	2	2	2	2

D	L	FÖRPACKNING		
		Art. nr	Antal	ML
3,0	12	53012	200	40
3,0	16	53016	200	40
3,0	20	53020	200	40
3,0	25	53025	200	40
3,0	30	53030	200	40
3,0	35	53035	200	16
3,5	16	53516	200	40
3,5	20	53520	200	40
3,5	25	53525	200	40
3,5	30	53530	200	16
3,5	35	53535	200	16
3,5	40	53540	200	16
4,0	12	54012	200	40
4,0	16	54016	200	40
4,0	20	54020	200	40
4,0	25	54025	200	16
4,0	30	54030	200	16
4,0	35	54035	200	16
4,0	40	54040	200	16
4,0	45	54045	200	12

D	L	FÖRPACKNING		
		Art. nr	Antal	ML
4,5	20	54520	200	16
4,5	25	54525	200	16
4,5	30	54530	200	16
4,5	35	54535	200	16
4,5	40	54540	200	12
4,5	45	54545	200	12
4,5	50	54550	200	12
5,0	20	55020	200	16
5,0	25	55025	200	16
5,0	30	55030	200	16
5,0	35	55035	200	12
5,0	40	55040	200	12
5,0	45	55045	200	8
5,0	50	55050	200	8
5,0	60	55060	100	12
5,0	70	55070	100	12
5,0	80	55080	100	12